


No.	Description	CARBON STEEL	SS 304	SS 316	Qty
1	Body	ASTM A 216 GR. WCB	ASTM A 351GR. CF8	ASTM A 351GR. CF8M	1
2	Cover	ASTM A 216 GR. WCB	ASTM A 351GR. CF8	ASTM A 351GR. CF8M	1
3	Element	SS 304	SS 304	SS 316	1
4	Gasket	SS 316 SPW WITH GR FILLER	SS 316 SPW WITH GR FILLER	SS 316 SPW WITH GR FILLER	1

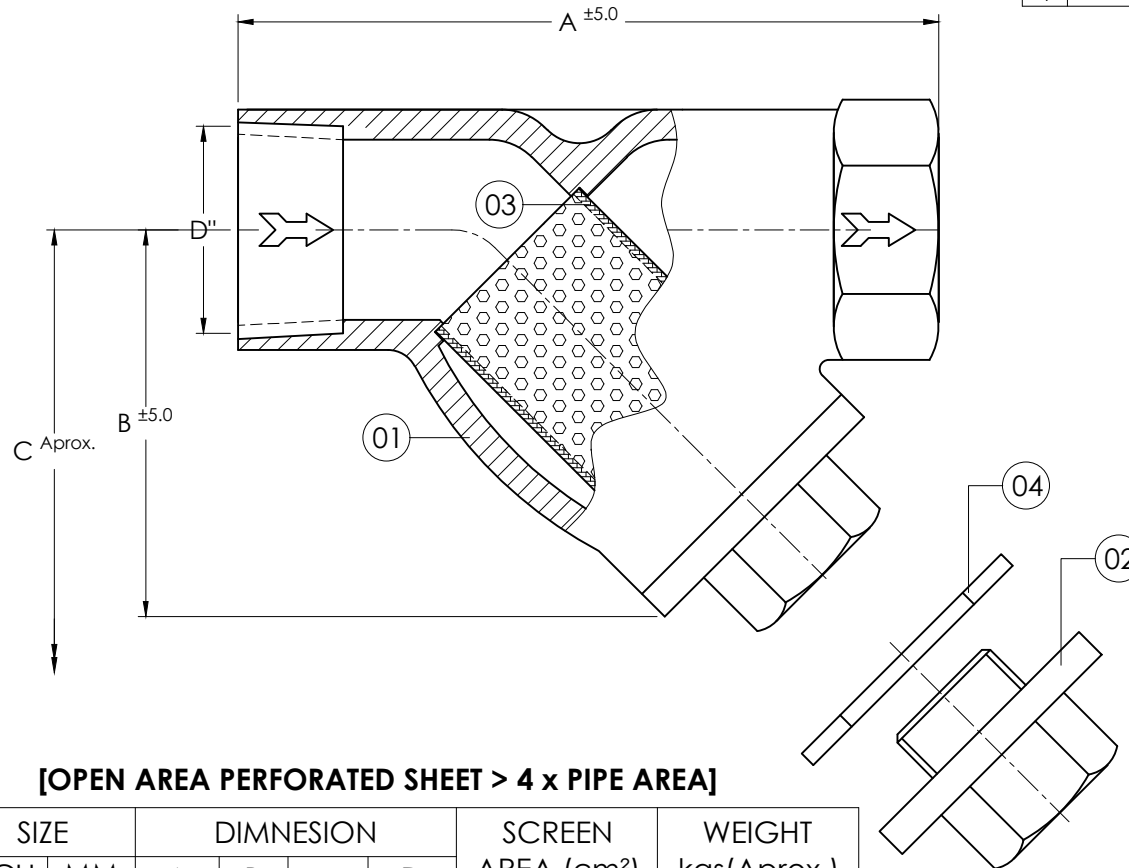

FEATURES:-

1. MACHINED SEATS IN BOTH BODY AND CAP TO ALIGN AND LOCK THE SCREEN IN PLACE TO STOP SEDIMENT BYPASS.
2. SELF - CLEANING IS ACCOMPLISHED BY OPENING THE PLUG OR VALVE CONNECTED TO THE BLOWOFF OUTLET.

NOTE:-

1. ALL DIMENSIONS ARE IN mm. IF NOT SPECIFIED.
2. M.O.C. AS PER PROCESS REQUIREMENT.

[OPEN AREA PERFORATED SHEET > 4 x PIPE AREA]

SIZE		DIMNESION				SCREEN AREA (cm ²)	WEIGHT kgs(Aprox.)
INCH	MM	A	B	C	D		
¼"	8	64	44	80	¼"	19	0.230
⅜"	10	64	44	80	⅜"	19	0.230
½"	15	64	44	80	½"	19	0.230
¾"	20	114	69	100	¾"	66	1.12
1"	25	114	69	100	1"	66	1.12
1½"	40	130	97	130	1½"	120	2.80
2"	50	160	118	165	2"	172	4.0

* WE ARE CONTINUOUSLY IMPROVING OUR PRODUCT. WE RESERVE THE RIGHT TO CHANGE DETAIL WITH OUT PRIOR NOTICE.

CLIENT :-		QTY. :-	
P.O.No :-		W.O.No :-	
SCALE :- NTS	SHEET :- 1:1	DRAWING No.	REV.
FILE :- 01	DATE :- 28/03/2026	ASF-2506-SE-STD	00
TITLE :- "Y" STRAINER SCREWED END		PROJECTION :-	
 www.strainersindia.com	PLOT NO-152/2	NAME	DATE
	ROAD-5,G.I.D.C.,	ACAD BY GPP	28/03/26
	KATHWADA,	CHED BY GPP	28/03/26
	AHMEDABAD.	APPD BY APT	28/03/26